


PRODUCT INFORMATION ANTI-RAM SLIDING GATE

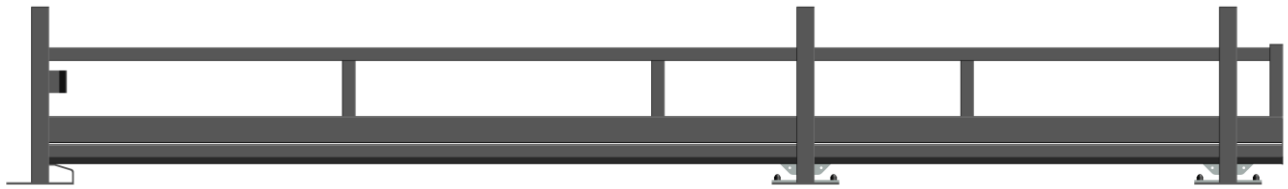

ANTI-RAM SLIDING GATE SBB

The sliding gate matches with anti-ram fencing (DBB) system. The principle of the sliding is the same as the well proven steel sliding gates Hop Fencing Systems deliver. This very robust sliding gate is the solution to close and secure your property.

PORTALS	The posts are made in 80x80 mm steel hollow section. Two guiding posts and one catching post is used. To the guiding portals are used to mount the guide rollers and wheels.
BOTTOM BEAM	The bottom beam is rectangular hollow section steel 100x120 mm with a bottom rail.
FRAME	The frame is 60x60 mm square hollow section steel with vertical posts to match.
CAPS	Plastic caps seal open ends.
BOTTOM RAIL	C-profile.
SUPPORT WHEELS	Two tandem-support wheels.
LOCK	The lock is standard delivered with Europrofile cylinder including 3 keys.
SURFACE TREATMENT	Hot dip galvanised according NEN-EN-ISO 1461.
POWDER COATING	For an appealing and finishing touch an extra coated finish is available. Applied according to NEN 5254.

TECHNICAL SPECIFICATIONS

BASIS	CLEAR OPENING	HEIGHT	POSTS	FRAME	BOTTOM BEAM	IN BETWEEN POSTS	LOCK	SET OF WHEELS
SB30	3000	600	80 x 80	60 x 60	100 x 120	60 x 60	KLAPSLLOT	2X TANDEM-SUPPORT WHEELS
SB40	4000	600	80 x 80	60 x 60	100 x 120	60 x 60	KLAPSLLOT	2X TANDEM-SUPPORT WHEELS
SB50	5000	600	80 x 80	60 x 60	100 x 120	60 x 60	KLAPSLLOT	2X TANDEM-SUPPORT WHEELS
SB60	6000	600	80 x 80	60 x 60	100 x 120	60 x 60	KLAPSLLOT	2X TANDEM-SUPPORT WHEELS
SB70	7000	600	80 x 80	60 x 60	100 x 120	60 x 60	KLAPSLLOT	2X TANDEM-SUPPORT WHEELS
SB80	8000	600	80 x 80	60 x 60	100 x 120	60 x 60	KLAPSLLOT	2X TANDEM-SUPPORT WHEELS

ALL SIZES ARE IN MM