


# PRODUCT INFORMATION TAIL ENDS

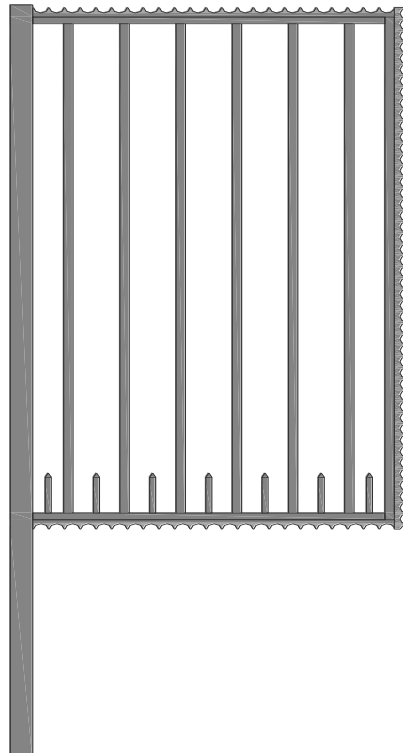

## BASE LINE (BL) TAIL END

The standard model with round palings welded between the top and bottom rail. Standard the tail end has dragon tails on three sides.

<b>FRAME</b>	The frame has three sides of tubes of 50x25x2 mm. Between the horizontal tubes palings have been placed.
<b>FRAME SLANTING</b>	The frame can be delivered with a different angle.
<b>PALINGS</b>	Round tubes with a diameter of 26 mm are being used. The centre-to-centre is 150 mm, optional other c/c distances can be delivered.
<b>POINTS BETWEEN PALINGS</b>	Between the palings points can be assembled at the bottom. These points are made out of steel and have a diameter of 16 mm and is approximately 150 mm high. This is an extra protection again climbers.
<b>GROUND ANCHORING</b>	On one side the tail end can be delivered with an extended post or on a base plate. The post is 60 x 60 mm.
<b>CONNECTING FENCING</b>	The posts are being delivered with gauze peak connection. Optional strips of a weld mesh connection can be delivered.
<b>SURFACE TREATMENT</b>	Hot dip galvanised according NEN-EN-ISO 1461.
<b>POWDER COATING</b>	For an appealing and finishing touch an extra RAL coating layer can be put on. This will be done according NEN 5254.

## TECHNICAL SPECIFICATIONS

BASE LINE	WIDE	HEIGHT	FRAME	POSTS	PALINGS	C/C PALINGS	C/C PALING 100	C/C PALINGS 120	POINTS BETWEEN PALINGS Ø 16
BL10.10	1000	1000	50 x 25 x 2	60 x 60 x 2	Ø 26	150	OPTION	OPTION	STANDARD
BL10.12	1000	1250	50 x 25 x 2	60 x 60 x 2	Ø 26	150	OPTION	OPTION	STANDARD
BL10.15	1000	1500	50 x 25 x 2	60 x 60 x 2	Ø 26	150	OPTION	OPTION	STANDARD
BL10.18	1000	1800	50 x 25 x 2	60 x 60 x 2	Ø 26	150	OPTION	OPTION	STANDARD
BL10.20	1000	2000	50 x 25 x 2	60 x 60 x 2	Ø 26	150	OPTION	OPTION	STANDARD
BL10.25	1000	2500	50 x 25 x 2	60 x 60 x 2	Ø 30	150	OPTION	OPTION	STANDARD

ALL SIZES IN MM