


PRODUCT INFORMATION TAIL ENDS

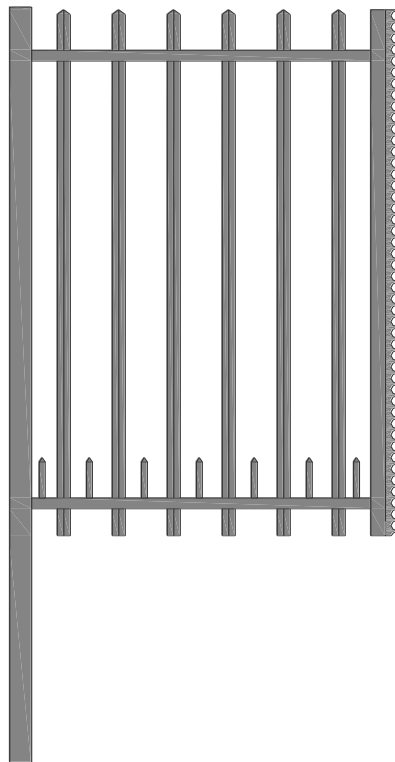

HIGH LINE (HL) TAIL END

The square palings go through the top and bottom rail. On one side a dragon tail has been placed.

FRAME

The frame has three sides of tubes of 60x40x2 mm. Between the horizontal tubes palings have been placed.

FRAME SLANTING

The frame can be delivered with a different angle.

PALINGS

Square tubes of 25x25 mm are being used. The centre-to-centre is 150 mm, optional other c/c distances can be delivered. From 1500 mm high the top of the paling will be cut to a point.

POINTS BETWEEN PALINGS

Between the palings points can be assembled at the bottom. These points are made out of steel and have a diameter of 16 mm and is approximately 150 mm high. This is an extra protection again climbers.

GROUND ANCHORING

On one side the tail end can be delivered with an extended post or on a base plate. The post is 60 x 60 mm.

CONNECTING FENCING

The posts are being delivered with gauze peak connection. Optional strips of a weld mesh connection can be delivered.

SURFACE TREATMENT

Hot dip galvanised according NEN-EN-ISO 1461.

POWDER COATING

For an appealing and finishing touch an extra RAL coating layer can be put on. This will be done according NEN 5254.

TECHNICAL SPECIFICATIONS

HIGH LINE	WIDE	HEIGHT	FRAME	POSTS	PALINGS	C/C PALINGS	C/C PALING 100	C/C PALINGS 120	POINTS BETWEEN PALINGS Ø 16
HL10.10	1000	1000	60 x 40 x 2	60 x 60 x 2	25 x 25	150	OPTION	OPTION	STANDARD
HL10.12	1000	1250	60 x 40 x 2	60 x 60 x 2	25 x 25	150	OPTION	OPTION	STANDARD
HL10.15*	1000	1500	60 x 40 x 2	60 x 60 x 2	25 x 25	150	OPTION	OPTION	STANDARD
HL10.18*	1000	1800	60 x 40 x 2	60 x 60 x 2	25 x 25	150	OPTION	OPTION	STANDARD
HL10.20*	1000	2000	60 x 40 x 2	60 x 60 x 2	25 x 25	150	OPTION	OPTION	STANDARD
HL10.25*	1000	2500	60 x 40 x 2	60 x 60 x 2	25 x 25	150	OPTION	OPTION	STANDARD

* STANDARD CUT TO A POINT
ALL SIZES IN MM