


# PRODUCT INFORMATION TAIL ENDS

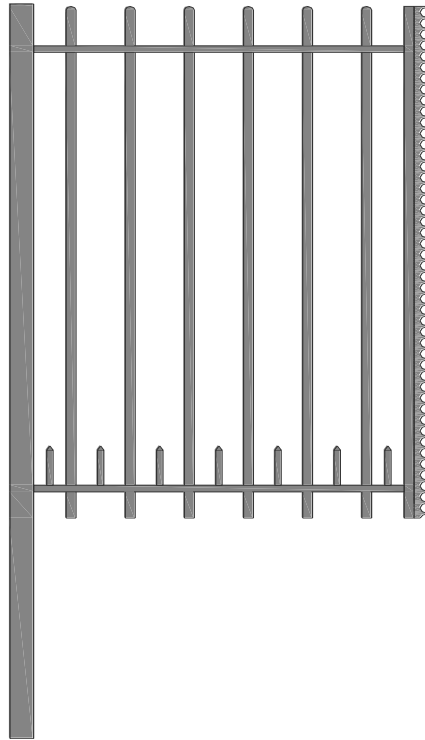

## SMART LINE (SL) TAIL END

The round palings go through the top and bottom rail. From a height of 1500 mm the top of the palings are oblique cut to a point. On one side a dragon tail has been placed.

### FRAME

The frame has three sides of tubes of 50x25x2 mm. Between the horizontal tubes palings have been placed.

### FRAME SLANTING

The frame can be delivered with a different angle.

### PALINGS

Round tubes with a diameter of 26 mm are being used. The centre-to-centre is 150 mm, optional other c/c distances can be delivered. From 1500 mm high the top of the paling will be cut to a point.

### POINTS BETWEEN PALINGS

Between the palings points can be assembled at the bottom. These points are made out of steel and have a diameter of 16 mm and is approximately 150 mm high. This is an extra protection again climbers.

### GROUND ANCHORING

On one side the tail end can be delivered with an extended post or on a base plate. The post is 60 x 60 mm.

### CONNECTING FENCING

The posts are being delivered with gauze peak connection. Optional strips of a weld mesh connection can be delivered.

### SURFACE TREATMENT

Hot dip galvanised according NEN-EN-ISO 1461.

### POWDER COATING

For an appealing and finishing touch an extra RAL coating layer can be put on. This will be done according NEN 5254.

## TECHNICAL SPECIFICATIONS

SMART LINE	WIDE	HEIGHT	FRAME	POSTS	PALINGS	C/C PALINGS	C/C PALING 100	C/C PALINGS 120	POINTS BETWEEN PALINGS Ø 16
SL10.10	1000	1000	50 x 25 x 2	60 x 60 x 2	Ø 26	150	OPTION	OPTION	STANDARD
SL10.12	1000	1250	50 x 25 x 2	60 x 60 x 2	Ø 26	150	OPTION	OPTION	STANDARD
SL10.15*	1000	1500	50 x 25 x 2	60 x 60 x 2	Ø 26	150	OPTION	OPTION	STANDARD
SL10.18*	1000	1800	50 x 25 x 2	60 x 60 x 2	Ø 26	150	OPTION	OPTION	STANDARD
SL10.20*	1000	2000	50 x 25 x 2	60 x 60 x 2	Ø 26	150	OPTION	OPTION	STANDARD
SL10.25*	1000	2500	50 x 25 x 2	60 x 60 x 2	Ø 26	150	OPTION	OPTION	STANDARD

\* STANDARD CUT TO A POINT  
ALL SIZES IN MM